


STYN216(S) thru STYN1216(S)


Discrete Thyristors(SCRs)



STYN216~STYN1216




Dimensions TO-220AB




Dim.	Millimeter	
	Min.	Max.
A	12.70	13.97
B	14.73	16.00
C	9.91	10.66
ØD	3.54	4.08
E	5.85	6.85
F	2.54	3.18
G	1.15	1.65
H	2.79	5.84
J	0.64	1.01
K	2.45BSC	
L	5.05BSC	
M	4.32	4.82
N	1.14	1.39
Q	0.35	0.56
R	2.29	2.79

Dimensions TO-263(D²PAK)



STYN216S~STYN1216S



Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	5.00	5.60	0.197	0.220
B	9.32	10.52	0.367	0.414
C	9.60	10.40	0.378	0.409
D	1.10	1.40	0.043	0.055
E	1.20	1.50	0.047	0.059
F	4.32	4.82	0.170	0.190
G	1.15	1.65	0.045	0.065
H	0.64	1.00	0.025	0.039
J	4.80	5.20	0.189	0.205
K	2.80	3.90	0.110	0.154
L	0.30	0.45	0.012	0.018



ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit	
I _{T(RMS)}	RMS on-state current (180° conduction angle)		T _c = 110°C	16	A
I _{T(AV)}	Average on-state current (180° conduction angle)		T _c = 110°C	10	A
I _{TSM}	Non repetitive surge peak on-state current	tp = 8.3 ms	T _j = 25°C	200	A
		tp = 10 ms		190	
I ² t	I ² t Value for fusing	tp = 10 ms	T _j = 25°C	180	A ² s
di/dt	Critical rate of rise of on-state current I _G = 2 x I _{GT} , tr ≤ 100 ns	F = 60 Hz	T _j = 125°C	50	A/μs
I _{GM}	Peak gate current	tp = 20 μs	T _j = 125°C	4	A
P _{G(AV)}	Average gate power dissipation		T _j = 125°C	1	W
T _{stg} T _j	Storage junction temperature range Operating junction temperature range			- 40 to + 150 - 40 to + 125	°C
V _{RGM}	Maximum peak reverse gate voltage (for STYN only)			5	V

Sirectifier®

STYN216(S) thru STYN1216(S)

Discrete Thyristors(SCRs)

ELECTRICAL CHARACTERISTICS (T_j = 25°C, unless otherwise specified)

■ STANDARD

Symbol	Test Conditions			TYNx08(S)	Unit
I _{GT}	V _D = 12 V R _L = 33 W			MIN.	2
				MAX.	25
V _{GT}				MAX.	1.3
V _{GD}	V _D = V _{DRM} R _L = 3.3 kW	T _j = 125°C	MIN.	0.2	V
I _H	I _T = 500 mA Gate open		MAX.	40	mA
I _L	I _G = 1.2 I _{GT}		MAX.	60	mA
dV/dt	V _D = 67 % V _{DRM} Gate open	T _j = 125°C	MIN.	500	V/μs
V _{TM}	I _{TM} = 32 A t _p = 380 μs	T _j = 25°C	MAX.	1.6	V
V _{t0}	Threshold voltage	T _j = 125°C	MAX.	0.77	V
R _d	Dynamic resistance	T _j = 125°C	MAX.	23	mW
I _{DRM}	V _{DRM} = V _{RRM}	T _j = 25°C	MAX.	5	μA
I _{RRM}		T _j = 125°C		2	mA

THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
R _{th(j-c)}	Junction to case (DC)		1.1	°C/W
R _{th(j-a)}	Junction to ambient	TO-220AB	60	°C/W
	S = 1.0 cm ²	TO-263	45	

S= copper surface under tab

PRODUCT SELECTOR

Part Number	Voltage (xxx)	Sensitivity	Package
STYNxx16S	200~1200	15 mA	TO-263
STYNxx16	200~1200	15 mA	TO-220AB

OTHER INFORMATION

Part Number	Marking	Weight	Base Quantity	Packing mode
STYNxx16S	STYN xx16S	1.8 g	50	Tube
STYNxx16	STYNxx16	2.0 g	50	Tube

Note: x = voltage


Sirectifier®

STYN216(S) thru STYN1216(S)


Discrete Thyristors(SCRs)

Marking

STYN1216
(TO-220AB)

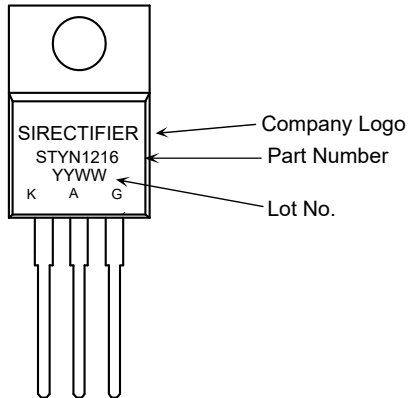

STYN1216S
(TO-263)

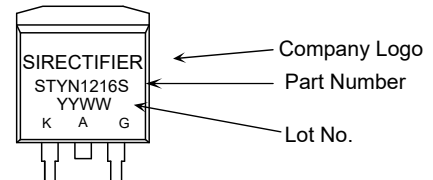

Ordering Information

Part Number	Package	Shipping	Marking Code
STYN1216	TO-220AB	50pcs / Tube	STYN1216
STYN1216S	TO-263	50pcs / Tube or 800pcs / Tape & Reel	STYN1216S