




# STYN255 thru STYN1855

## Thyristor Discretes (SCRs)



Dimensions TO-247AD

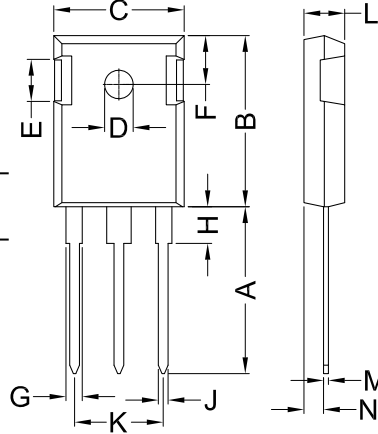

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

K=Cathode, A=Anode, G=Cate

	VRRM	VRSM
	V	V
STYN255	200	300
STYN655	600	700
STYN855	800	900
STYN1055	1000	1100
STYN1255	1200	1300
STYN1655	1600	1700
STYN1855	1800	1900

Symbol	Test Conditions	Maximum Ratings		Unit
		STYN255~855 / STYN1055~1855		
$I_{TRMS}$ $I_{TAVM}$	$T_{VJ}=T_{VJM}$ $T_C=85^{\circ}C$ ; 180° sine	55 35		A
$I_{TSM}$	$T_{VJ}=45^{\circ}C$ $V_R=0$ t=10ms (50Hz), sine t=8.3ms (60Hz), sine	440 470	520 560	A
	$T_{VJ}=T_{VJM}$ $V_R=0$ t=10ms(50Hz), sine t=8.3ms(60Hz), sine	390 420	460 500	
$i^2t$	$T_{VJ}=45^{\circ}C$ $V_R=0$ t=10ms (50Hz), sine t=8.3ms (60Hz), sine	1140 1100	1350 1300	A <sup>2</sup> s
	$T_{VJ}=T_{VJM}$ $V_R=0$ t=10ms(50Hz), sine t=8.3ms(60Hz), sine	890 870	1050 1030	
$(di/dt)_{cr}$	$T_{VJ}=T_{VJM}$ f=50Hz, $t_p=200\mu s$ $V_D=2/3V_{DRM}$ $I_G=0.15A$ $di_G/dt=0.15A/\mu s$ repetitive, $I_T=55A$	100		A/ $\mu s$
	non repetitive, $I_T=I_{TAVM}$	500		
$(dv/dt)_{cr}$	$T_{VJ}=T_{VJM}$ ; $R_{GK}=\infty$ ; method 1 (linear voltage rise) $V_{DR}=2/3V_{DRM}$	500		V/ $\mu s$
$P_{GM}$	$T_{VJ}=T_{VJM}$ $I_T=I_{TAVM}$ $t_p=30\mu s$ $t_p=300\mu s$	5		W
		2.5		
$P_{GAV}$		0.5		W
$V_{RGM}$		10		V
$T_{VJ}$ $T_{VJM}$ $T_{stg}$		-40...+125 125 -40...+125		$^{\circ}C$
$M_d$ $F_c$	Mounting torque (M3) Mounting force with clip	0.8...1.2 20...120		Nm N
Weight	typical	6		g

# STYN255 thru STYN1855

## Thyristor Discretes (SCRs)

Symbol	Test Conditions	Characteristic Values		Unit
		STYN255~855	STYN1055~1855	
$I_R, I_D$	$T_{VJ}=T_{VJM}; V_R=V_{RRM}; V_D=V_{DRM}$	5		mA
$V_T$	$I_T=55A; T_{VJ}=25^{\circ}C$	1.50	1.60	V
$V_{TO}$	For power-loss calculations only ( $T_{VJ}=125^{\circ}C$ )	1.00		V
$r_T$		8.5		$m\Omega$
$V_{GT}$	$V_D=6V; T_{VJ}=25^{\circ}C$ $T_{VJ}=-40^{\circ}C$	1.5 2.5		V
$I_{GT}$	$V_D=6V; T_{VJ}=25^{\circ}C$ $T_{VJ}=-40^{\circ}C$	25 50		mA
$V_{GD}$	$T_{VJ}=T_{VJM}; V_D=2/3V_{DRM}$	0.2		V
$I_{GD}$		3		mA
$I_L$	$T_{VJ}=25^{\circ}C; t_p=10\mu s;$ $I_G=0.1A; di_G/dt=0.1A/\mu s$	75		mA
$I_H$	$T_{VJ}=25^{\circ}C; V_D=6V; R_{GK}=\infty$	50		mA
$t_{gd}$	$T_{VJ}=25^{\circ}C; V_D=1/2V_{DRM}$ $I_G=0.1A; di_G/dt=0.1A/\mu s$	2		$\mu s$
$R_{thJC}$	DC current	0.9		K/W
$R_{thJH}$	DC current	typ.	1.10	K/W
$a$	Max. acceleration, 50 Hz	50		$m/s^2$

